

Verlegeanleitung


planeo Rigid Klick Vinyl inkl. 1 mm Trittschalldämmung (Drop-Down)



<p>🕒 48h 🌡️ 15-30°C / 59-86°F 🚫🌞🌧️</p> <p>Humidity 40 - 60 %</p> <p>≤ 200 mm/8"</p> <p>1</p>	<p>2</p> <p>≥ 0,2 mm PE</p> <p>W20 STOP</p>	<p>!</p> <p>1m / 40"</p> <p>max. 2 mm / 1 m</p> <p>max. 0.08" / 40"</p> <p>3</p>	<p>!</p> <p>4</p>	<p>!</p> <p>5</p>
<p>6</p>	<p>CONCRETE MAX 2,0 CM %</p> <p>ANHYDRITE MAX 0,5 CM %</p> <p>HEATING:</p> <p>CONCRETE MAX 1,5 CM %</p> <p>ANHYDRITE MAX 0,3 CM %</p> <p>7</p>	<p>!</p> <p>max. 27°C</p> <p>max. 81°F</p> <p>8</p>	<p>!</p> <p>Sound Absorption System</p> <p>9</p>	<p>10</p> <p>PE FOIL</p> <p>min. 0,2 mm PE</p>
<p>ca. 2 cm / 4/5 inch</p> <p>ca. 20 cm / 8 inch</p> <p>11</p>	<p>12</p> <p>min. 0,2 mm PE</p>	<p>!</p> <p>13</p>	<p>14</p>	<p>15</p> <p>10mm/0.4"</p>








Verlegeanleitung

planeo Rigid Klick Vinyl inkl. 1 mm Trittschalldämmung (Drop-Down)

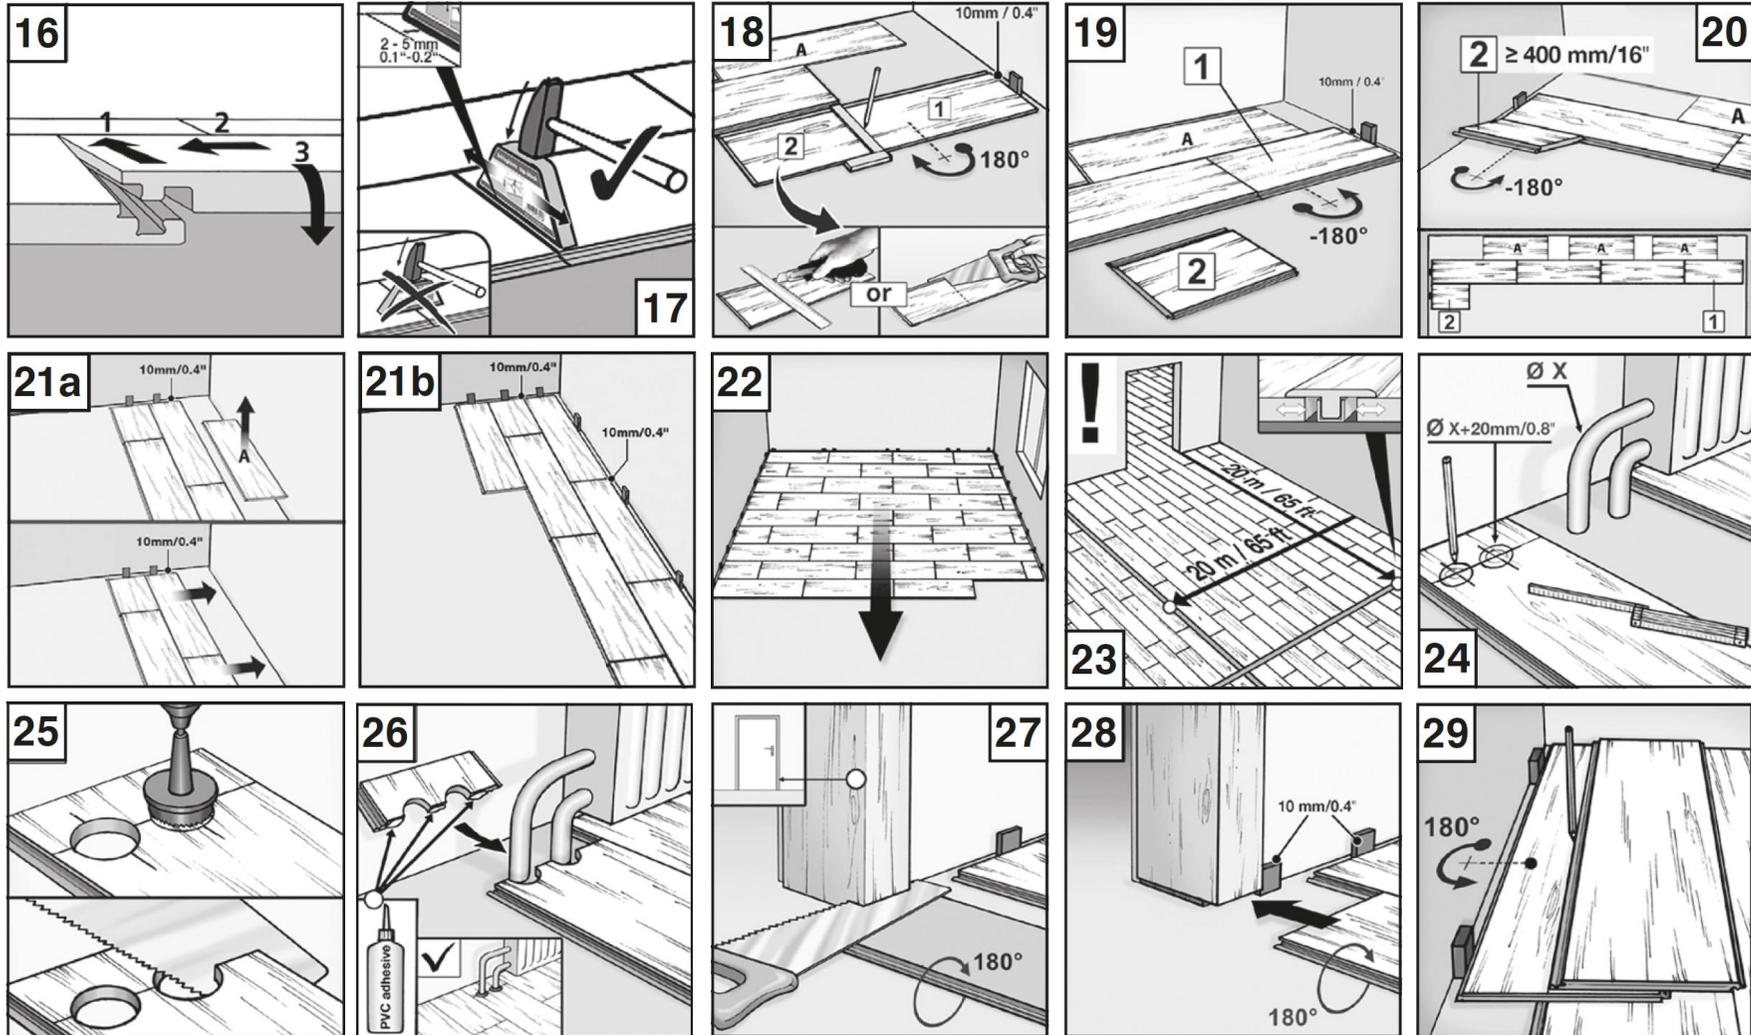



Verlegeanleitung

planeo Rigid Klick Vinyl inkl. 1 mm Trittschalldämmung (Drop-Down)

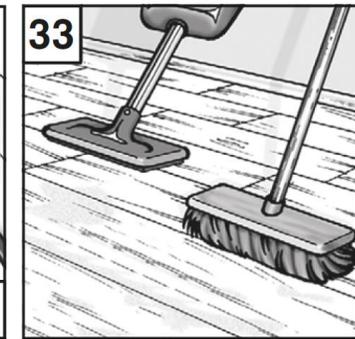

HINWEIS: Prüfen Sie alle Paneele vor der Verlegung auf Mängel. Paneele mit optischen Mängeln (sichtbar aus einer Höhe von 1,5 m) sollten nicht verlegt werden.

Disassembly:



planeo 



Impressum / Imprint