




PRODUCT DETAILS		FACTS		TECHNICAL PROPERTIES		
Surface treatment	Oil	Design	1-strip	Moisture	EN13183	7%±2%
	This floor should be oiled immediately after	Grading	Dynamic	content		
	installation.	Range	Kährs Original	Minimun Mean Density kg/m³ >500 kg/m³		
Dimensions	1900 x 190 x 15 mm	Collection	Artisan Collection	Reaction To Fire	EN13501-1	Dfl-s1
Weight per Package (kg)	17 kg	Resandable	2-3 times	Formaldehyde	EN717-1	E1
Area per Package (m²)	2.2 m ²	Natural/Stained	Stained	Emission		
Area per pallet (m²)	0 m ²	Joint	Woodloc® 5G	Content PCP	CEN/TR14823	≤ 5 x 10-6n
Package info	Packages may contain start and stop boards.	Floor heating	Yes	Breaking	EN1533	NPD
		Warranty	30 years	 Strength N/mm² 		
		Wear-layer material	Hardwood	Thermal EN1266 Conductivity	EN12664	0,14 W/mK
		Wear Layer Thickness	3.5 mm			
DETAIL DESCRIPTION		(mm)		Thermal Resista	ance R-Value	.11 (m2K/W)
All naturally occuring wood colour variations allowed, from light to dark brown. Sapwood may occur. The product includes very large sound and black knots and cracks. Knots and cracks will be		Core material	Pine/Spruce lamella	Biological	EN350-2	Class 1
		Thickness (mm)	15 mm	Durability		
		Installation method	Glue-down, Floating	CARB2		Compliant
		Surface Colour	White IFV	Slipperiness	CEN/TS15676	NPD

COLOUR CHANGE

 $\label{thm:color} \textbf{Stained product-noticable color change over time.}$

Other products in this collection

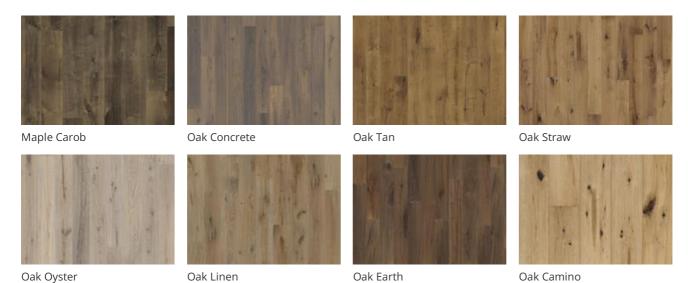

CERTIFICATES











Descriptions & Imagery

All samples, images and product description, plus photo and brochure specifications are there for the sole purpose of giving an approximate idea of the items described in them. They shall not form part of the contract or have any contractual force and should be viewed for illustrative purposes only. We cannot guarantee that your computer's display or the quality of the print will accurately reflect the colour of the products. Your product may vary slightly from the images within this literature.