


PRODUCT DETAILS		FACTS		TECHNICAL PROPERTIES		
Surface treatment	Oil This floor should be oiled immediately after installation.	Design	1-strip	Moisture	EN13183	7%±2%
		Grading	Expressive	content		
		Range	Kährs Supreme	Minimun Mean	imun Mean Density kg/m ³ >500	
Dimensions	2420 x 187 x 15 mm	Collection	Småland Collection	Reaction To Fire	EN13501-1	Dfl-s1
Neight per Package (kg)	22 kg	Resandable	2-4 times	Formaldehyde Emission	EN717-1	E1
Area per Package (m²)	2.7 m ²	Natural/Stained	Stained			
Area per pallet (m²)	122.4 m ²	Brinell Value	3,7	Content PCP	CEN/TR14823	≤ 5 x 10-6n
Package info	Packages may contain start and stop boards.	Joint	Woodloc® 5S	Breaking Strength N/mm ²	EN1533	NPD
		Floor heating	Yes			
		Warranty	30 years	Thermal EN1	EN12664	0,14 W/mK
		Wear-layer material	Hardwood	Conductivity		
DETAIL DESCRIPTION		Wear Layer Thickness	3.5 mm	Thermal Resistance R-Value .11 (m2K/V		.11 (m2K/W)
All naturally occuring wood colour variations allowed, from light to dark brown. Sapwood may occur. The product includes very large sound and black knots and cracks. Knots and cracks will be present in all sizes and numbers.		(mm)		Biological	EN350-2	Class 1
		Core material	Pine/Spruce lamella	Durability		
		Thickness (mm)	15 mm	CARB2		Compliant
		Installation method	Floating, Glue-down	Slipperiness CEN/TS1567		NPD
		Surface Colour	Flour white			

COLOUR CHANGE

Stained product - noticable color change over time.

Other products in this collection

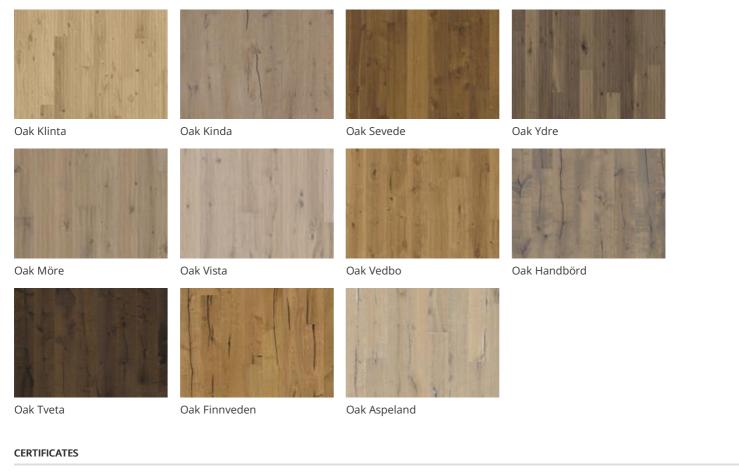



Descriptions & Imagery

All samples, images and product description, plus photo and brochure specifications are there for the sole purpose of giving an approximate idea of the items described in them. They shall not form part of the contract or have any contractual force and should be viewed for illustrative purposes only. We cannot guarantee that your computer's display or the quality of the print will accurately reflect the colour of the products. Your product may vary slightly from the images within this literature.